

# ATLANTIC REEFER

597,139 cbft / 6,804 sqm / 8,550 pallets



## General

Built	October-1998	International *)	<b>GT</b> 14,505.00/13,055.00	<b>NT</b> 7,580.00
Flag	Liberia	Panama Canal		12,166.00
Port of Registry	Monrovia	Suez Canal		13,035.79
Callsign	D5FE2			
IMO/Lloyds nr	9179256		<b>Draft</b>	<b>DWAT</b>
Length over all [m]	175.72	Tropical		
Beam [m]	22.60	Summer	9.72	17,217
Depth [m]	13.30	Winter		
Bowthruster(s)	-			
Exhaust Gas Scrubber	Open Loop	Permanent Ballast		867

\*) The first GT value is the official value on the ITC. Because of the special (partly) hatchless design of the vessel, a second GT has been assigned to this vessel which is to be used for calculation of harbour duties etc. This is the second GT value. This value is also shown on the ITC in a remark.

## Reefer

Holds	4
Hatches	4
Compartments	19
Minimum Deckheight [m]	2.20 (excl local areas).
Allowable weight of forklift including cargo	maximum 7 mt (Forklift to be equipped with minimum 4 non hard rubber airtyres)
Temperature zones	8
Cooling sections	1A - 1B - 1C D - 2A B C - 2D E - 3A B C - 3D E - 4A B C - 4D E
Temperature range [dC]	-30/+15
Air circulations [/hr]	90
Air renewals [/hr]	2
USDA equipped	Yes, valid until 14-January-2026
Controlled Atmosphere	CA pre-piped
Modified Atmosphere	No equipment on board



# ATLANTIC REEFER

597,139 cbft / 6,804 sqm / 8,550 pallets

## Classification Details

Classification Society	Bureau Veritas (BV)
Main Class symbols	I
Service Notations	+Hull, +Refrigerated cargo ship / equipped for carriage of containers
Navigation Notations	Unrestricted navigation
Additional Class Notations	+Ref-cargo -Aircont, Inwatersurvey
Machinery	+Mach
Equivalent Finnish/Swedish	
Ice Strengthening	-

## Reefer Compartment Capacity Breakdown

	Hold 1		Hold 2		Hold 3		Hold 4		Total	
	Cbft	Sqm	Cbft	Sqm	Cbft	Sqm	Cbft	Sqm	Cbft	Sqm
A	35,432	399.00	18,457	202.00	18,445	203.00	18,219	202.00	90,553	1,006.00
B	26,435	269.00	36,430	433.00	36,037	431.00	39,374	467.00	138,276	1,600.00
C	17,273	183.00	37,816	453.00	41,793	497.00	41,631	479.00	138,513	1,612.00
D	14,038	157.00	33,862	391.00	40,443	479.00	36,454	408.00	124,797	1,435.00
E			31,067	339.00	42,544	483.00	31,389	329.00	105,000	1,151.00
<b>Total</b>	<b>93,178</b>	<b>1,008.00</b>	<b>157,632</b>	<b>1,818.00</b>	<b>179,262</b>	<b>2,093.00</b>	<b>167,067</b>	<b>1,885.00</b>	<b>597,139</b>	<b>6,804.00</b>

Hold 1- 4 Legend

Non insulated Deck, air passes through (aka Spar Deck)

Insulated, air tight Deck or Tanktop

Non Insulated, air tight Deck

## Hatch sizes Reefer holds

	Hold 1	Hold 2	Hold 3	Hold 4
	l x b	l x b	l x b	l x b
Deck	8.10 x 6.00	8.10 x 6.00	8.10 x 6.00	8.10 x 6.00
A	8.10 x 6.00	8.10 x 6.00	8.10 x 6.00	8.10 x 6.00
B	8.10 x 6.00	8.10 x 6.00	8.10 x 6.00	8.10 x 6.00
C	5.20 x 5.20	8.10 x 6.00	8.10 x 6.00	8.10 x 6.00
D		8.10 x 6.00	8.10 x 6.00	8.10 x 6.00



# ATLANTIC REEFER

597,139 cbft / 6,804 sqm / 8,550 pallets

## Container slot flexibility

	<u>Hold</u>	<u>Deck &amp; Hatches</u>	<u>Total</u>
40'x8'6"(+20'x8'6")	124 (0)	102 (0)	226 (0)
40'x9'6"(+20'x8'6")	124 (0)	102 (0)	226 (0)
20'x8'6"(+40'x8'6")	64 (0)	136 (34)	200 (34)

Homogeneous intake of TEU's of 14mt: 0

Actual intake and distribution always subject to a vessel's stability, trim, bending moments, sheer forces, deadweight, permissible weights, permissible lashing gear break loads, container lashing and stowage plans, ranges of visibility, IMDG stowage/segregation requirements, Panama / Suez Canal Regulations and Cargo Securing Manual.

## Reefer Plugs

Deck: 102x40' or 136x20' slots on main deck and reefer hold hatches.  
Holds: Each container hold can accommodate 62x40' or 32x20'.  
Total: 200

Note: Bay 09 rows 05, 06, 07, 08 are not reachable by own crane

## Remote Reefer Monitoring System

Type: None  
Maker: N/A  
Version:  
RDC handheld available: No

## Fittings

Fully cellularized for 40' containers in holds. 2 x 20' units can be loaded in one 40' cell.

## Permissible Stackloads

Deck: 56 / 90 mt per 20' / 40' stack  
Except near hatch1: 40 / 60 mt per 20' / 40' stack

Reefer hatches: 0 / 60 mt per 20' / 40' stack  
Except hatch1: 60 / 30 mt per 20' / 40' stack

Container Holds: 50 / 240 mt per 20' / 40' stack

## Hatch sizes

<u>Hold</u>	<u>Hatches # / Type</u>	<u>Position</u>	<u>length x width</u>	<u>Panels #</u>	<u>Position</u>	<u>length x width</u>	<u>Panels #</u>
X	0 Open Top	None	N/A	0			
Y	0 Open Top	None	N/A	0			

Container holds X and Y are located in between reefer holds 2 and 3. Both container holds are hatchless.



# ATLANTIC REEFER

597,139 cbft / 6,804 sqm / 8,550 pallets

## Standard Voyage Container Carrying Capacity

Nr of High Cube (9.5') Reefers 170  
of which Selfsustained 170

'Standard Voyage' = voyage from Panama Canal to Rotterdam, with a full cargo of bananas in the holds and departing with full bunker tanks. Containers on this voyage are considered to weigh 26 mt gross.

## Reefer Plugs

Nr. of electrical Reefer Plugs 200

## General Note Container Carrying Capacity

Figures for container intake on standard voyage are preliminary

## Cargo Gear

2 Cranes x 36.0 mt  
1 Crane x 8.0 mt  
1 Crane x 40.0 mt

## Exhaust Gas Scrubber

Type of scrubber: Open Loop  
Lowest sulphur% in exhaust gasses based on fuels with max sulphur contents of 3.5%: 0.10 %

- Based on fuel with max Sulphur content of 3.5%:

- + max 0.5% Sulphur in exhaust gas upto full speed consumption.
- + max 0.1% Sulphur in exhaust gas on reduced consumption only.

- Local regulations may prohibit use of scrubber in which case alternative low Sulphur fuel/destilate has to be used.



# ATLANTIC REEFER

597,139 cbft / 6,804 sqm / 8,550 pallets

## Bunker Tank Capacities

	<u>Cbm (100%)</u>	<u>Cbm at max filling level*</u>	<u>mt**</u>
Bunkertanks dedicated for High Sulphur RMG380 (IFO380)	995	846	838
Overflow/Settling/Daytanks for RMG380 (IFO380)	13	0	0
VLS	165	140	139
<b>Total bunker capacity for RMG380 (IFO380)</b>	<b>1,173</b>	<b>986</b>	<b>977</b>
ULS	314	267	229
<b>Total bunker capacity for DMA (MGO)</b>	<b>314</b>	<b>267</b>	<b>229</b>

\*) Vessel shall not mix bunkers from different bunkerings in 1 bunker tank. This may reduce the actual bunker capacity.

\*\*) Capacity in mt serve as indication only. Actual capacity in mt depending on the specific gravity and temperature of the supplied bunkers.

Vessel to be solely supplied with fuels minimal as per ISO 8217:2017 or any subsequent amendment thereof. All supplied fuels shall be suitable to enable main propulsion and auxiliary machinery to operate efficiently and without harmful effects and in line with any national and/or international requirements. Fuels to be mineral based products and shall not contain waste lubricants (ULO), chemicals or any other harmful substances and shall be of homogenous and stable nature. Charterers to buy and arrange bunkers only from qualified suppliers and/or from majors and carry out their own quality checks as deemed necessary for their control. Bunkers supplied in Amsterdam/Velsen/Beverwijk/IJmuiden region must have an origin from a major supplier (BP/Shell/Exxon); products sourced from Glencore or Trafigura are explicitly excluded.

Charterers warrant that whenever bunkers are ordered for the vessel, the order not to put a lien on the vessel and explicitly request "The Products shall not include waste chemicals, waste lubricants and/or other non-fuel components."

BIMCO Bunker Fuel Sulphur Content clause for Time Charter parties 2004 to apply.


If vessel is redelivered in an ECA area, Charterers warrant that vessel will be redelivered with sufficient bunkers suitable for consumption as per the requirements of the relevant ECA area to reach a port or place where suitable bunkers may be supplied.

Vessel participates in fuel testing program. Samples are taken during each fuel from each supplied grade. Costs involved to be equally shared between Owners and Charterers. Vessel shall not consume any supplied fuel without having received full fuel analysis report confirming the fuel's



# ATLANTIC REEFER

597,139 cbft / 6,804 sqm / 8,550 pallets

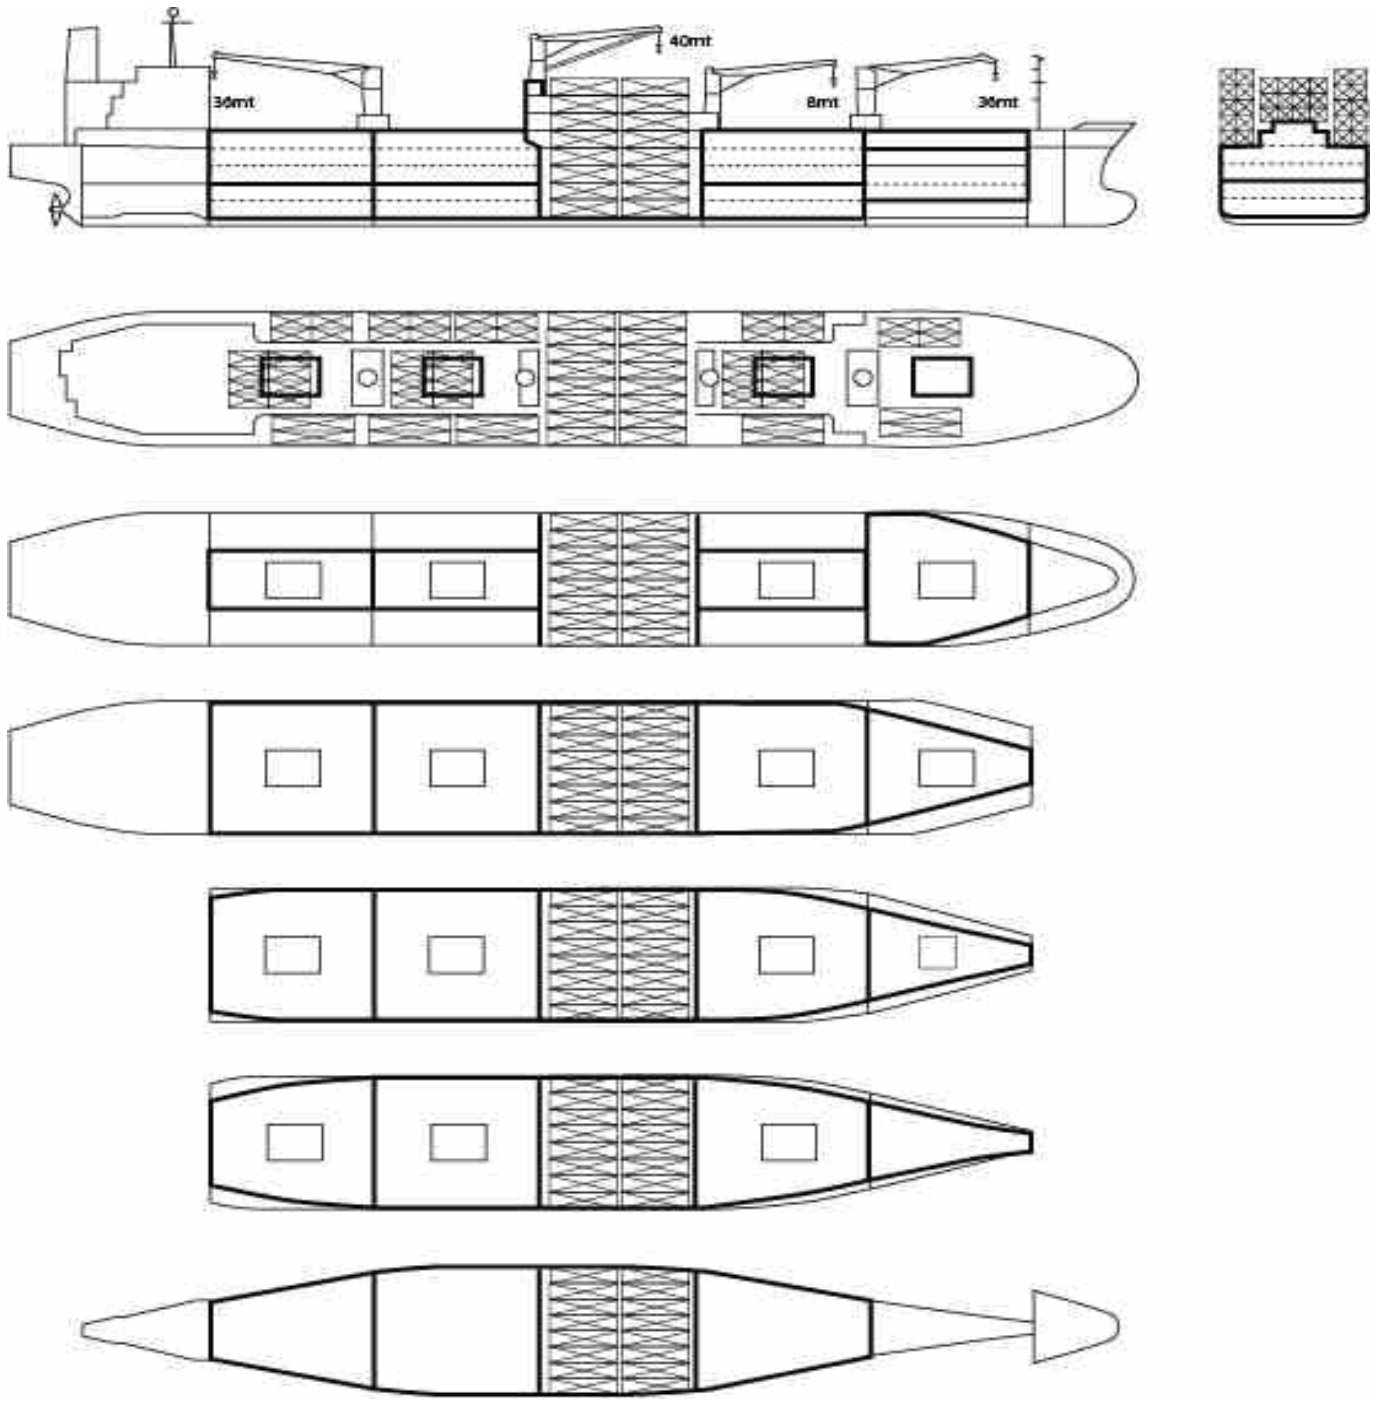

## General Remarks

- Pallet Intake figures are indication only. The figures are based on a stowage factor of 1.32 pallet/sqm in reefer holds, full load of reefer containers based on the standard voyage with 20 pallets in each container

